


Vertical balers



B-series

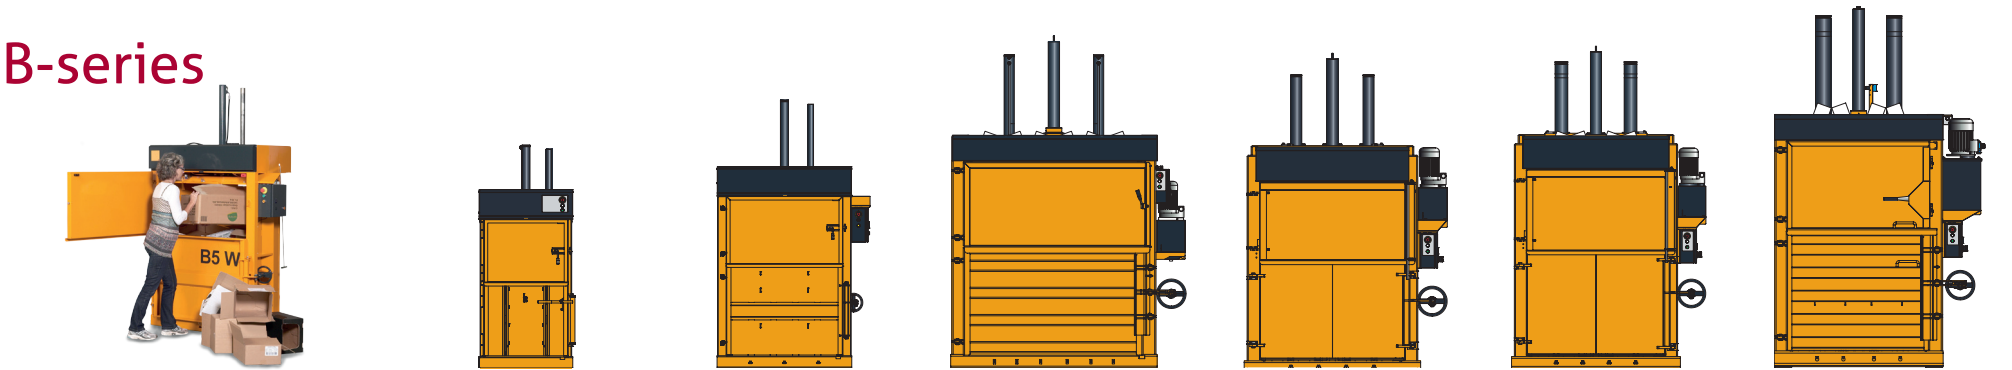


Technical specifications	B3	B5 W	B16 W	B20 1)	B30 1)	B50
Press force (t)	3	5	16	20	30	50
Power supply	1x230V 10A	1x230V 10A	3x230/400V 25/16A	3x230/400V 25/16A	3x230/400V 25/16A	3x400V 32A
Noise level (dB)	65-68	65-68	67	62-64	62-64	70-75
Cycle time (sec)	26	33	31	36	55	31
Dimensions WxDxH (mm)	845 x 745 x 1965	1355 x 890 x 2370	2085 x 1070 x 2940	1760 x 1025 x 2770	1765 x 1025 x 2905	1860 x 1075 x 3180
Weight (kg)	310	600	1660	1240	1560	2025
Filling opening WxH (mm)	700 x 460	1000 x 500	1525 x 610	1200 x 550	1200 x 610	1200 x 600
Bale size WxDxH (mm)	700 x 500 x 650	1000 x 700 x 800	1525 x 800 x 950	1200 x 800 x 850	1200 x 800 x 950	1200 x 800 x 1200
Bale weight cardboard (kg)	30-50	80-110	250-300	200-250	280-350	400-500
Bale weight plastic (kg)	40-60	90-130	275-350	250-300	350-450	450-550



Try the Vertical Door ¹⁾ - NEW
A model VD has a vertical door, which gives an ergonomical filling of waste.

- Value for money
- Simple and safe

X-series

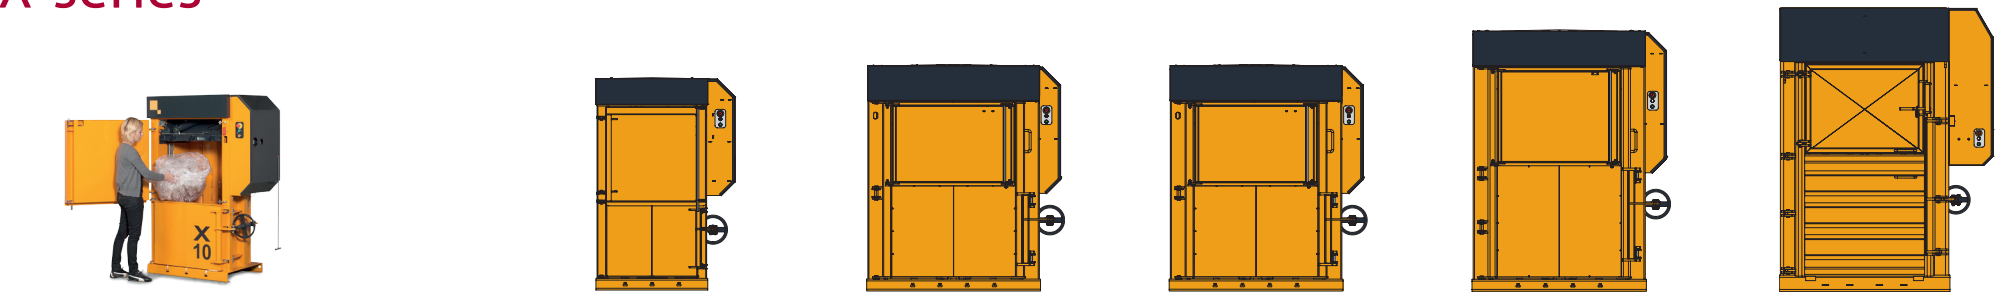


Technical specifications	X10	X16	X25 2)	X30 2)	X50
Press force (t)	10	16	25	30	50
Power supply	3x230/400V 25/16A	3x230/400V 25/16A	3x230/400V 25/16A	3x230/400V 25/16A	3x400V 32A
Noise level (dB)	59-60	59-60	59-60	59-60	71
Cycle time (sec)	12	15	23	25	23
Dimensions WxDxH (mm)	1250 x 1030 x 1900	1745 x 1260 x 1995	1745 x 1260 x 1995	1745 x 1260 x 2295	1950 x 1400 x 2580
Weight (kg)	665	1390	1410	1710	2590
Filling opening WxH (mm)	800 x 610	1090 x 530	1090 x 530	1090 x 655	1090 x 600
Bale size WxDxH (mm)	800 x 600 x 600	1200 x 800 x 800	1200 x 800 x 800	1200 x 800 x 1000	1200 x 800 x 1100
Bale weight cardboard (kg)	70-90	200-250	250-300	280-350	400-450
Bale weight plastic (kg)	80-110	250-300	300-400	350-450	450-550



Try the Automatic Door ²⁾ - NEW
A model AD has a sliding door that closes and opens automatically, giving a quick filling of waste.

- Durable construction
- Fast cycle time
- Low noise leve



Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel. +45 7517 3266
Fax +45 7517 3177
bramidan@bramidan.dk
www.bramidan.com